


## Sidelay

Standard on all machines

*Web alignment is achieved by lateral shifting of the SP1*

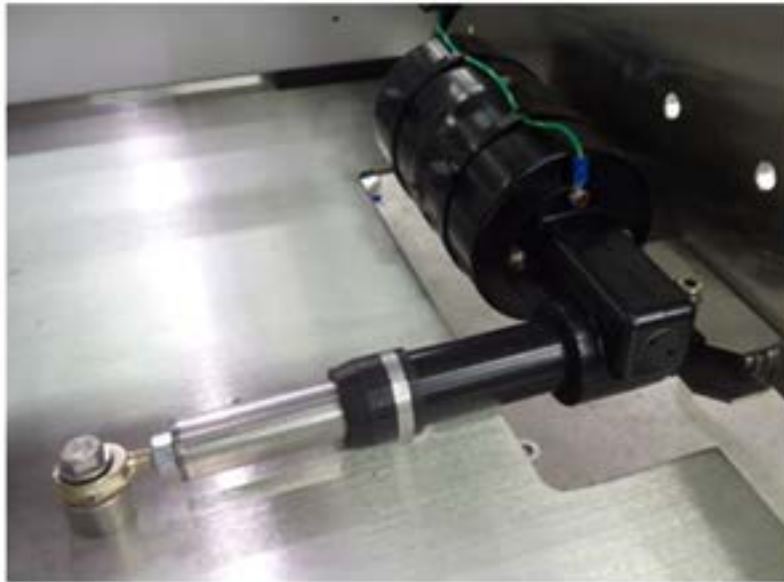

### **Advantages, Functions & Features**

- Provides lateral motion +/- 1 in (25 mm) from centerline
- Left/right position adjustable via HMI

### **Functional Requirements**

- Splicer frame cannot be structurally attached to the downstream process